

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 19 TOWNSHIP 14 RANGE 5

DATE: -2-25-02 8-14-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-3-97

IN. S.P.C. E ZONE NAD '83

NAME: 14051902

N: 488954.4521(m)

E: 69810.4900(m)

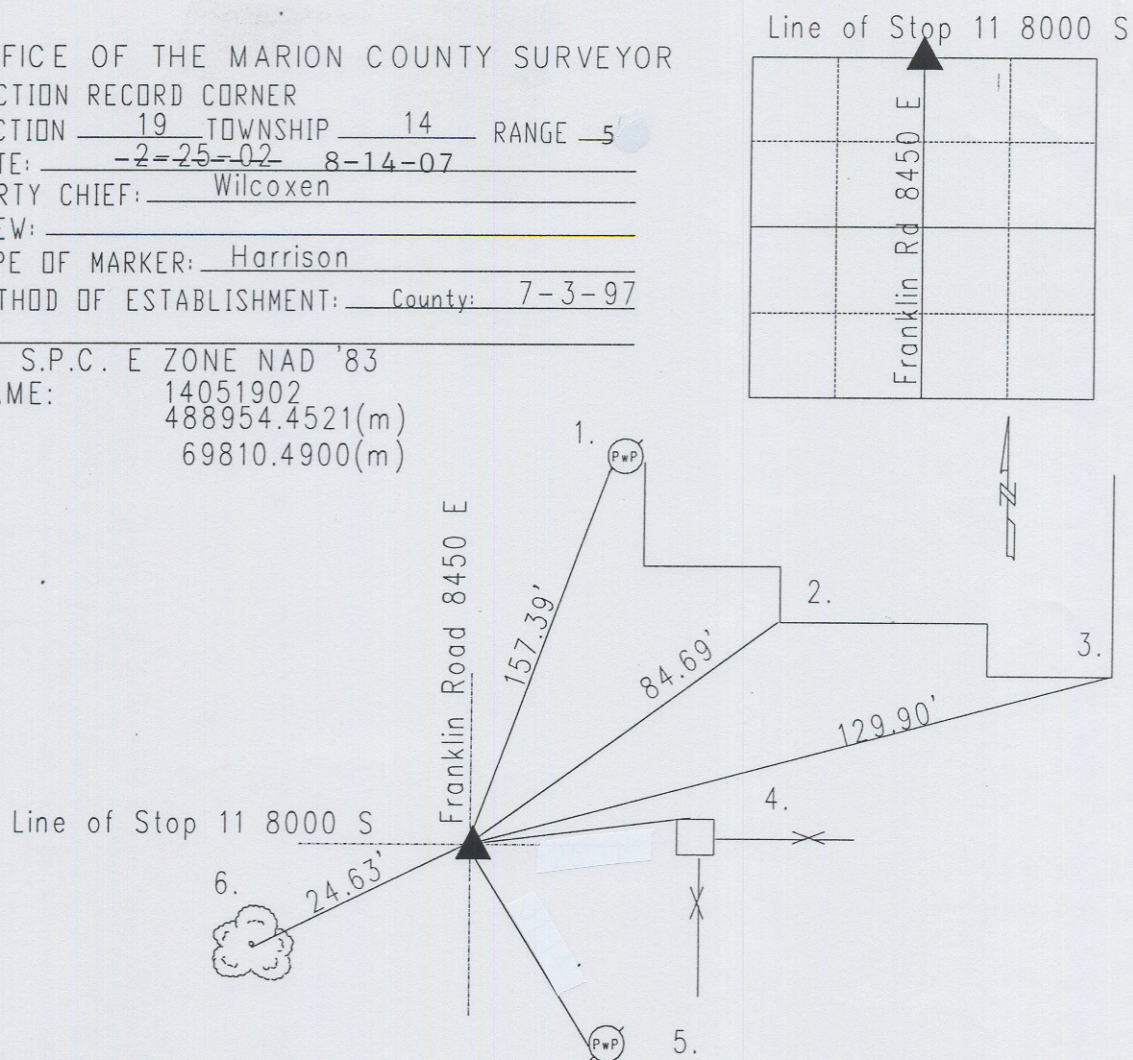

Original post set 1820 by Hendricks with witnesses: 12" beech N 19 E 7 links; 14" ash S 71 W 36 links per Marion County Atlas pg. 13. Hosbrook 2-18-1852 called no stone or witness: 14" beech S 76 W 33 links, 10" beech N 44 1/2 W 60 links per Franklin Township Legal Survey Book pg. 40. 1951 tie called a pin over stone. MCSO 3-12-58 called nail w/brass washer. McLand 1-3-69 called railroad spike. McLand 4-20-72 called a 1"x1" hub 6" down. Fortner 12-13-74 called a PK nail. Kiste 7-10-94 called a road nail. Excavated by Kiste 7-3-97 PK nail fd 6" dn. 3/4" rebar found 10" down under PK nail. Harrison set. Re-tied 2-25-02 by Wilcoxon.

14051902

REF.	DISTANCE	DESCRIPTION
1.	157.39'	PK nail w/brass washer W PwP#28-801 A 10"up
2.	84.69'	SW corner of ADDRESS 7951
3.	129.90'	SE corner of ADDRESS 7951
4.	24.90'	PK nail N wooden fence post 6"up
5.	31.00'	PK nail w/brass washer SW pwP#61-801 B 4"up
6.	24.63'	Boat spike S 10" ash 2"up